


9 - 12 VDC 150 mA
Wall Wart

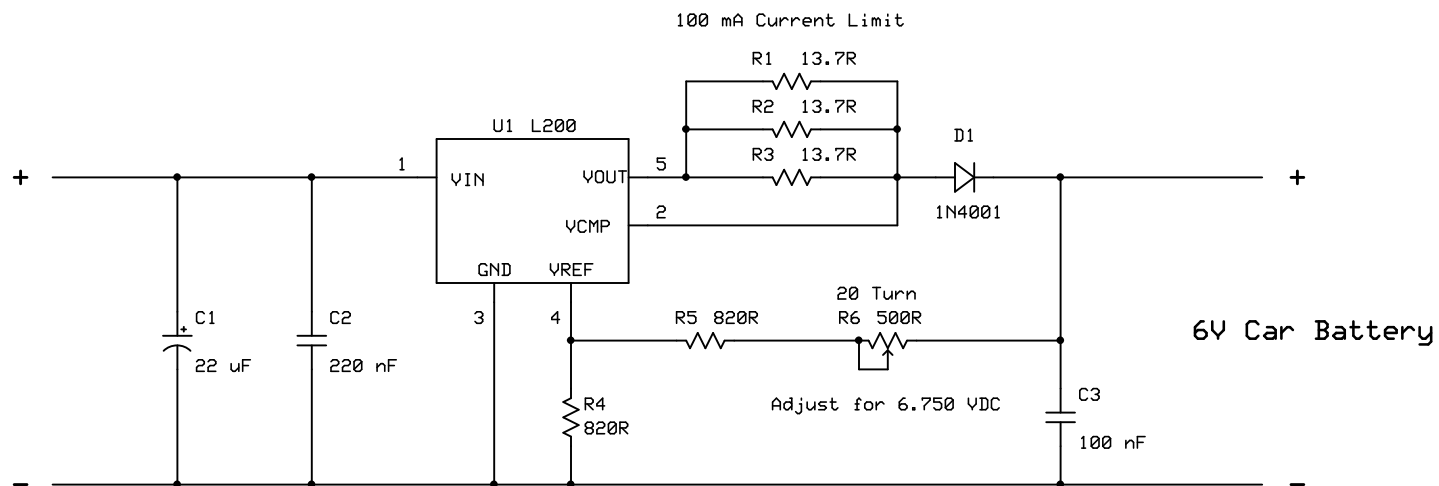

Use regular charger to fully charge battery
Use float charger to maintain battery
2.25V to 2.30V per cell

All resistors 1% 1/4W
All capacitors 35 VDC
Use heat sink on L200
Large battery clips Radio Shack 270-343

6V Car Float Charger

ModularSynthesis

David J. Brown

12/2/2010

Rev (none)

Page 1/1